


Infrared Narrow Bandpass Filters

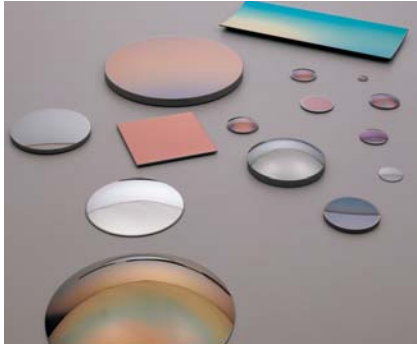

Key Features

- Excellent coating uniformity
- Tightly toleranced precision filter expertise
- Flat spectral profile
- High peak transmission value
- Excellent blocking
- Wide range of filters and assemblies for the infrared sensing and imaging instrumentation market
- High volume capability
- Expert application engineering support
- Available filter substrates are: Si, Ge, Glass, Sapphire, Quartz, Fused Silica, ZnS, ZnSe


Applications

- Environmental monitoring
- Anaesthesia monitoring
- Temperature sensing
- Thermal imaging

Standard

- Temperature, humidity, mild abrasion, adherence: MIL-F-48616

JDSU Infrared Narrow Bandpass filters provide high transmission in specified wavelength regions and extremely high rejection outside the band. Bandpass center wavelengths can be located anywhere in the region from 1 μm to 16 μm . Filter designs are available on a variety of infrared transmitting substrates.

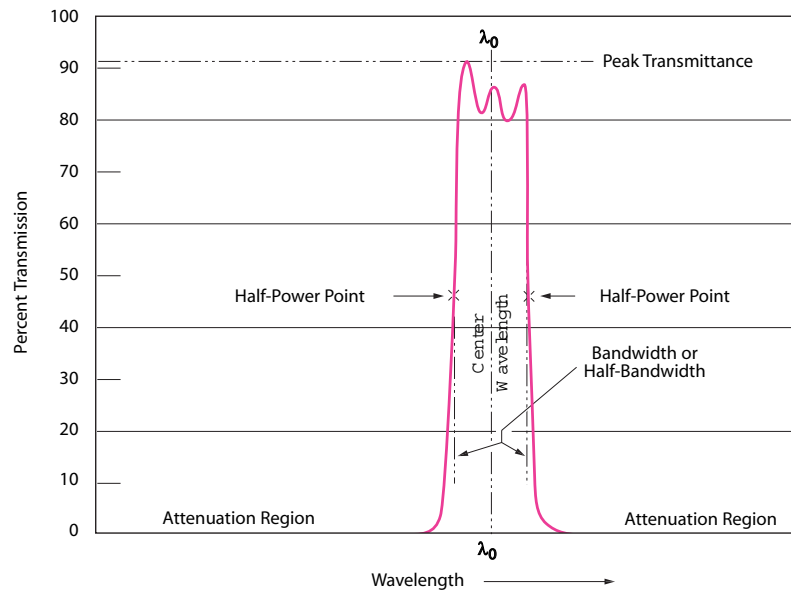

Spectral Characteristics

Parameter	Symbol	Conditions	Minimum	Maximum
Wavelength range ¹	λ_0	At 25° C, 0° AOI	1 μm	16 μm
Center wavelength tolerance	$\Delta\lambda_0$	At 25° C, 0° AOI	$\pm 0.25 \mu\text{m}$	$\pm 2 \mu\text{m}$
Nominal bandwidth ¹	HBW	At 25° C, 0° AOI	1%	10%
Cut-on/Cut-off slope ^{1,2}		At 25° C, 0° AOI	1%	3%
Absolute center wavelength drift vs temperature			0.002%/°C	0.01%/°C

1. AOI: Angle Of Incidence.

2. Cut-on/Cut-off slopes $\geq 2\%$ are for standard designs and consistent with standard production yields.

Minimum Average Peak Transmission

Center Wavelength Range	Nominal Bandwidth 1% to 1.5%	Nominal Bandwidth 2% to 2.5%	Nominal Bandwidth 4% to 5.5%	Nominal Bandwidth 8% to 10%
1 to 1.25 μm	55%	65%	70%	45%
1.25 to 2.5 μm	50%	60%	60%	55%
2.5 to 5.5 μm	55%	65%	70%	70%
5.5 to 11.5 μm	60%	65%	75%	80%
11.5 to 12.5 μm	50%	55%	65%	80%
12.5 to 13.5 μm	50%	55%	65%	65%
13.5 to 14.5 μm	40%	50%	55%	65%
14.5 to 15.5 μm	30%	35%	45%	55%

1. All peak transmission values are minimal and consistent with standard production yields.

2. Higher transmission values are available upon request if filters do not have to be completely attenuated outside the bandpass.

3. All transmission values are for filters attenuated above and below bandpass to $T \leq 0.1\%$ average.

Filter Size

Type	Conditions	Minimum	Maximum
Square or rectangle	$\Delta\lambda_0 \leq 1\%$	2 mm	50 mm
Square or rectangle	$\Delta\lambda_0 > 1\%$	2 mm	100 mm
Diameter		2 mm	150 mm
Thickness		0.3 mm	-
Thickness tolerance ¹		$\pm 0.025 \text{ mm}$	-

1. Thickness tolerance for standard design is $\pm 0.1 \text{ mm}$

All statements, technical information and recommendations related to the products herein are based upon information believed to be reliable or accurate. However, the accuracy or completeness thereof is not guaranteed, and no responsibility is assumed for any inaccuracies. The user assumes all risks and liability whatsoever in connection with the use of a product or its application. JDSU reserves the right to change at any time without notice the design, specifications, function, fit or form of its products described herein, including withdrawal at any time of a product offered for sale herein. JDSU makes no representations that the products herein are free from any intellectual property claims of others. Please contact JDSU for more information. JDSU and the JDSU logo are trademarks of JDS Uniphase Corporation. Other trademarks are the property of their respective holders. ©2006 JDS Uniphase Corporation. All rights reserved. 30137509 Rev. 001 04/06 IRNBPDS.CO.AE